



Europäisches  
 Patentamt

European  
 Patent Office

Office européen  
 des brevets

REC'D 30 MAR 2004

WIPO

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-  
 gen stimmen mit der  
 ursprünglich eingereichten  
 Fassung der auf dem näch-  
 sten Blatt bezeichneten  
 europäischen Patentanmel-  
 dung überein.

The attached documents  
 are exact copies of the  
 European patent application  
 described on the following  
 page, as originally filed.

Les documents fixés à  
 cette attestation sont  
 conformes à la version  
 initialement déposée de  
 la demande de brevet  
 européen spécifiée à la  
 page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02256908.1

**PRIORITY  
 DOCUMENT**  
 SUBMITTED OR TRANSMITTED IN  
 COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;  
 Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
 p.o.

R C van Dijk

Best Available Copy



Anmeldung Nr:  
Application no.: 02256908.1  
Demande no:

Anmeldetag:  
Date of filing: 03.10.02  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Cryovac, Inc.  
100 Rogers Bridge Road,  
Building A  
Duncan, S.C. 29334-0464  
ETATS-UNIS D'AMERIQUE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se référer à la description.)

An apparatus for taking up a succession of imbricated taped bags and method of  
loading a bag train on a bag loader

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

B65B43/12

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SK TR

AN APPARATUS FOR TAKING UP A SUCCESSION OF IMBRICATED TAPED  
BAGS AND METHOD OF LOADING A BAG TRAIN ON A BAG LOADER

The present invention relates to an apparatus for taking up tapes on which a  
5 succession of imbricated bags, suitable for packaging, are carried. For example, meat  
cuts, or poultry may be loaded into the bags as they are removed from the tapes by a bag  
loader.

The use of taped imbricated bags has been known for many years and the most  
commonly available form of these bags uses two separate adhesive carrier tapes which  
10 have an imbricated array of the bags placed on the tapes in such a way that the adhesive  
face of each tape contacts the exposed part of each bag in the imbricated array. Normally  
the lead bag of the array is attached to the tapes by its end at which the mouth is disposed.

US 4,798,412 discloses a bag loader which includes a differential drive unit which  
drives two driving shafts onto which a cassette can be loaded. The cassette contains two  
15 tape winding spools one for each tape of a chain of bags. The differential drive unit of  
the bag loader can wind up the tapes onto the spools with equal tension. However, the  
drive unit of the bag loader is complicated and requires many components because of the  
two shafts which must extend from the bag loader with axes which are parallel but not  
coaxial. Furthermore, such a cassette is required to hold the spools in place and is  
20 necessarily quite large and bulky as the spools are positioned one beside the other to  
allow connection to the two shafts of the drive unit of the bag loader.

The present invention provides an apparatus for taking up a succession of  
imbricated packaging bags carried by a pair of carrier tapes, said cassette comprising: two  
carrier tape winding spools positioned coaxially with one another; and a differential gear  
25 unit positioned between said spools, said differential gear unit being connectable to a  
shaft of a bag loader whereby two carrier tapes can be wound up on said spools with  
equal tension.

Thus the bag loader is less complex with only a single driving shaft and the high  
number of gears in the differential drive unit of the bag loader are no longer required.

30 The gears of the differential gear unit are only required to be used for one bag train and

thus may be made of cheap materials, for example of injection moulded plastics. If the apparatus is to be reusable, harder wearing materials may need to be used.

5 The apparatus dimensions can be vastly reduced compared to the cassette dimensions when the two spools were positioned side by side within the cassette. This is only possible because of the coaxial positioning of the differential gear unit with the spools. This results in a lowering of the cost of the apparatus because of the elimination of the need for a cassette housing or reduction in the bulk of the housing with the coaxial arrangement and, as the dimensions are less, the thickness of the walls for a given rigidity and strength can be reduced. The increased cost of the apparatus due to the need to  
10 provide it with a differential drive unit is offset by the reduced amount of material needed for the apparatus.

The present invention also provides a method of loading a bag train on a bag loader, comprising: taking a bag train incorporating a succession of imbricated packaging bags on two supply tapes from which they are to be removed during the loading  
15 operation, the supply tapes having lead ends equipped with two tape-winding spools with a differential gear unit is positioned coaxially between the spools; connecting the differential gear unit to a shaft of said bag loader; and driving said spools to wind up said tapes on said spools with equal tension to bring each of the imbricated bags successively to a loading position where the bag is loaded and separated from the tapes.

20 The invention will be described by way of example only with reference to the accompanying drawings in which:

Figure 1 is a perspective view of a bag train with cassette being loaded on to a bag loader; and

Figure 2 is an exploded view of a cassette of the present invention.

25 Figure 1 shows schematically how the present invention is employed in use on a bag loader machine 100. A bag train 50 comprises a plurality of packaging bags 51a, 51b, 51c arranged in an imbricated way on two parallel carrier tapes 52a, 52b (usually about  $\frac{1}{2}$  bag width apart). The bags 51a, 51b, 51c are attached to the tapes 52a, 52b by adhesive. The end of the tapes 52a, 52b are positioned in a cassette 10. The cassette 10  
30 is loaded on to a shaft 112 of the bag loader 100. Although a door to protect the cassette 10 is shown in the figure, in practice this may not be necessary. The shaft 112 is rotated

by motor 110. The shaft 112 engages with the cassette 10 and drives the internal workings of the cassette to take up the tapes 52a, 52b. On taking up of the tapes 52a, 52b the succession of bags 51a, 51b, 51c are brought closer to the bag loader machine 100. As the tapes are taken up successive bags 51a, 51b, 51c can be removed from the tapes 52a, 52b and filled.

During drawing of the bags 51a, 51b, 51c towards the bag loader 100, it is necessary to keep the tension in the two tapes 52a, 52b equal so that the bag openings, usually directed in the direction of advancement, remain in the same orientation to the bag loader 100 (i.e. usually parallel to the bag loader) such that the bags may be removed from the tapes automatically. In the present invention this is done by use of the cassette 10 which ensures that the tapes 52a, 52b, as they are drawn in towards the bag loader around rollers or stationary pins 54a, 54b, are kept in equal tension. This is achieved by the internal workings of the cassette 10 which are illustrated in Figure 2.

The way in which the cassette 10 takes up the carrier tapes 52a, 52b with equal tension will now be described with reference to Figure 2. The cassette 10 comprises two carrier tape winding spools 12a, 12b upon which the tapes 52a, 52b of the bag train 50 are to be wound. The spools 12a, 12b are enclosed in a housing of the cassette 90 comprising first and second components 14a, 14b which can, for example, snap fit together. A slot 15 formed in the first housing component 14a allows entry of the tapes 52a, 52b into the housing and thereby onto spool 12a for one tape 52a and spool 12b for the other tape 52b. Two slots may be provided, one for entry of each tape 52a, 52b. If those slots are positioned as far apart as the tapes are apart when attached to the bags, no rollers or pins 54a, 54b are required. The tapes 52a, 52b are wound around the spools 12a, 12b in the same direction.

The spools 12a, 12b are positioned coaxially with one another inside of the housing. Each of the spools 12a, 12b is depicted as having a central cut out 13 though this is not necessarily the case. In fact, only one of the spools 12a, 12b will require a central cut out 13 so that the shaft 112 of the bag loader can access a differential gear unit 20 positioned between and coaxially with the spools 12a, 12b. The shaft 112 passes through the housing 14b in a cut out 16, through the central cut out 13 of spool 12b to mesh with a mating hole 22 in a core 21 of the differential gear unit 20. Thus, the spools

12a, 12b and core 21 of the differential gear unit are coaxial with the shaft 112 of the bag loader when the cassette is loaded on the bag loader.

Mounted on the core 21 is at least one bevel pinion 24. In the preferred embodiment there are four bevel pinions 24 positioned symmetrically around the outside of the core 21. The bevel pinions 24 are mounted to the core such that they can freely rotate around an axis perpendicular to the longitudinal axis of mating hole 22.

The differential gear unit 20 is held substantially coaxially with said spools 12a, 12b by being positioned in recesses in the surfaces of the spools facing each other so that the spools can be positioned close together, possibly even touching. The action of engaging the cassette with the shaft 112 may serve to axially align the spools 12a, 12b and the core 21 of the differential gear unit and to hold them together. Alternatively, the spools and differential gear unit may be designed to snap fit together (or otherwise held together) without the aid of the cassette 10 or shaft 112 so that the shaft 112 only engages with the differential gear unit 20.

Each of the spools 12a, 12b is provided with an integrally moulded bevel gear 26 (in the recess) which, when the cassette 10 is assembled, faces the other of said spools 12a, 12b and meshes with the bevel pinions 24. In this way, if equal tension is present in the tapes 52a, 52b and the shaft 112 of the bag loader rotates the core 21, the two spools 12a, 12b will be rotated at the same rate as the bevel pinions 24 will not rotate around their axis of rotation but the whole core and spool assembly will rotate at the same rate around the longitudinal axis of the shaft 112. However, if tension in one of the tapes 52a, 52b decreases, the spool 12a, 12b on which that tape is wound will rotate faster than the other spool. This happens because the bevel pinions 24 will begin to rotate until the tension in the tapes 52a, 52b wound around their respective spools 12a, 12b is equalised. In this way it is possible to maintain the bag train 50 in an orientation such that each successive imbricated bag 51a, 51b, 51c will arrive at the bag loader in the perfect orientation for removal from the tapes 52a, 52b as the tapes 52a, 52b are taken up by the spools 12a, 12b of the cassette 10.

As will be apparent, the cassette housing is not required for the correct functioning of the invention. The spools and drive unit could be individually directly assembled onto the shaft 112 or could be assembled on to the shaft 112 as one and be

snap fitted or otherwise fixed together for convenience. A lip and flange on the core 21 to engage through a central through hole of the spools would be a satisfactory way of seeing to this.

5 The cassette housing components 14a, 14b, spools 12a, 12b and the parts of the differential gear unit may all be formed by injection moulding of plastics material. This is cheap and the thus produced components easily have the durability to last for the entire bag train which can comprise several hundred bags.

10 It is envisaged that the cassette will be stored, for example during shipping, with the leading part of each of the tapes wound in so that the entire bag chain 50 may be loaded onto the loader easily without first having to wind the tapes 51a, 52b onto the spools 12a, 12b.

15 The cassette 10 can be re-usable. In use, the machine operator would attach the next bag train to the spools of a spare cassette whilst the machine is still working using another bag train. Once that other bag train is finished, the operator can substitute the old cassette for the spare one and restart the machine.

The present invention has been described by way of example only and variations are possible. In particular, as described above, the cassette 10 is not necessary for the functioning of the invention. The construction of the housing of the cassette could be varied.

## CLAIMS

1. An apparatus for taking up a succession of imbricated packaging bags carried by a pair of carrier tapes, said apparatus comprising:

5 two carrier tape winding spools positioned coaxially with one another; and  
a differential gear unit positioned between said spools, said differential gear unit being connectable to a shaft of a bag loader whereby two carrier tapes can be wound up on said spools with equal tension.

10 2. An apparatus according to claim 1, wherein said spools each have a recess in a surface which faces the other spool and wherein said differential gear unit is positioned in said recesses.

15 3. An apparatus according to claim 1 or 2, wherein each of said spools is integrally formed with a bevel gear coaxial with said spool.

4. An apparatus according to claim 3, wherein said differential gear unit comprises a core and at least one satellite pinion gear attached to said core and positioned to mesh with each bevel gear.

20 5. An apparatus according to claim 4 wherein said core comprises a mating hole for mating with a shaft of a bag loader.

25 6. An apparatus according to any one of the preceding claims, wherein said spools and differential gear unit are positioned in a cassette housing.

7. A bag train comprising a succession of imbricated packaging bags carried by a pair of parallel carrier tapes and an apparatus according to any one of the preceding claims.

30



8. A bag train according to claim 7 wherein ends of said carrier tapes are each partially wound on a spool of said apparatus.

9. A method of loading a bag train on a bag loader, comprising:

5 taking a bag train incorporating a succession of imbricated packaging bags on two supply tapes from which they are to be removed during the loading operation, the supply tapes having lead ends equipped with two tape-winding spools with a differential gear unit is positioned coaxially between the spools;

connecting the differential gear unit to a shaft of said bag loader; and

10 driving said spools to wind up said tapes on said spools with equal tension to bring each of the imbricated bags successively to a loading position where the bag is loaded and separated from the tapes.

## ABSTRACT

### AN APPARATUS FOR TAKING UP A SUCCESSION OF IMBRICATED TAPED BAGS AND METHOD OF LOADING A BAG TRAIN ON A BAG LOADER

5

The preferred embodiment is a cassette for taking up two carrier tapes (52a, 52b) of a bag train incorporating a succession of imbricated packaging bags (51a, 51b, 51c). The cassette comprises two spools (12a, 12b), one for taking up each carrier tape and a differential gear unit (20) positioned between the spools. The differential gear unit is  
10 capable of being driven by a shaft (112) of a bag loader and of rotating the spools to take up the respective supply tapes with equal tension. The spools are positioned co-axially in the cassette. Also disclosed is a method of loading a bag chain on a bag loader using such a cassette.

15 Fig. 2

1/2

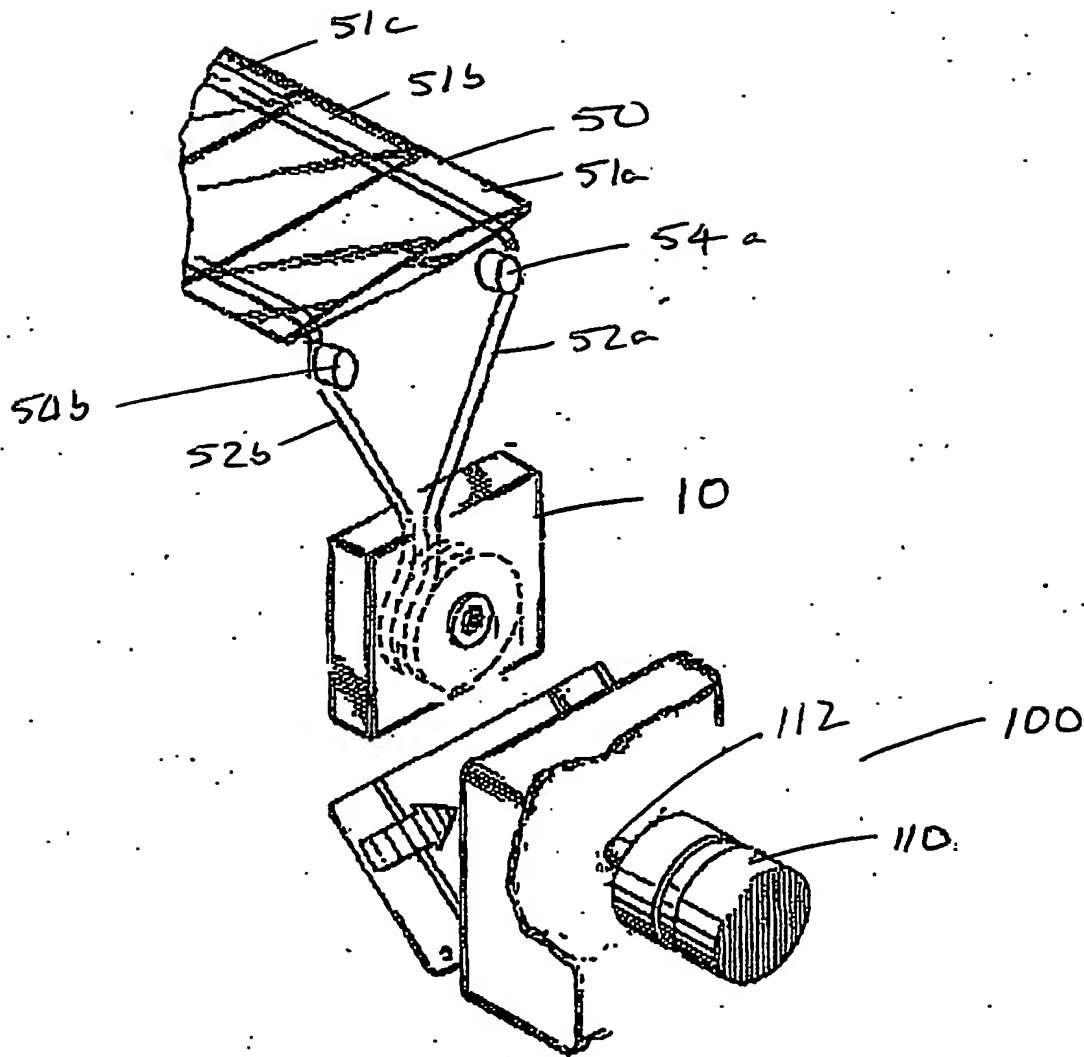


Fig. 1

2/2

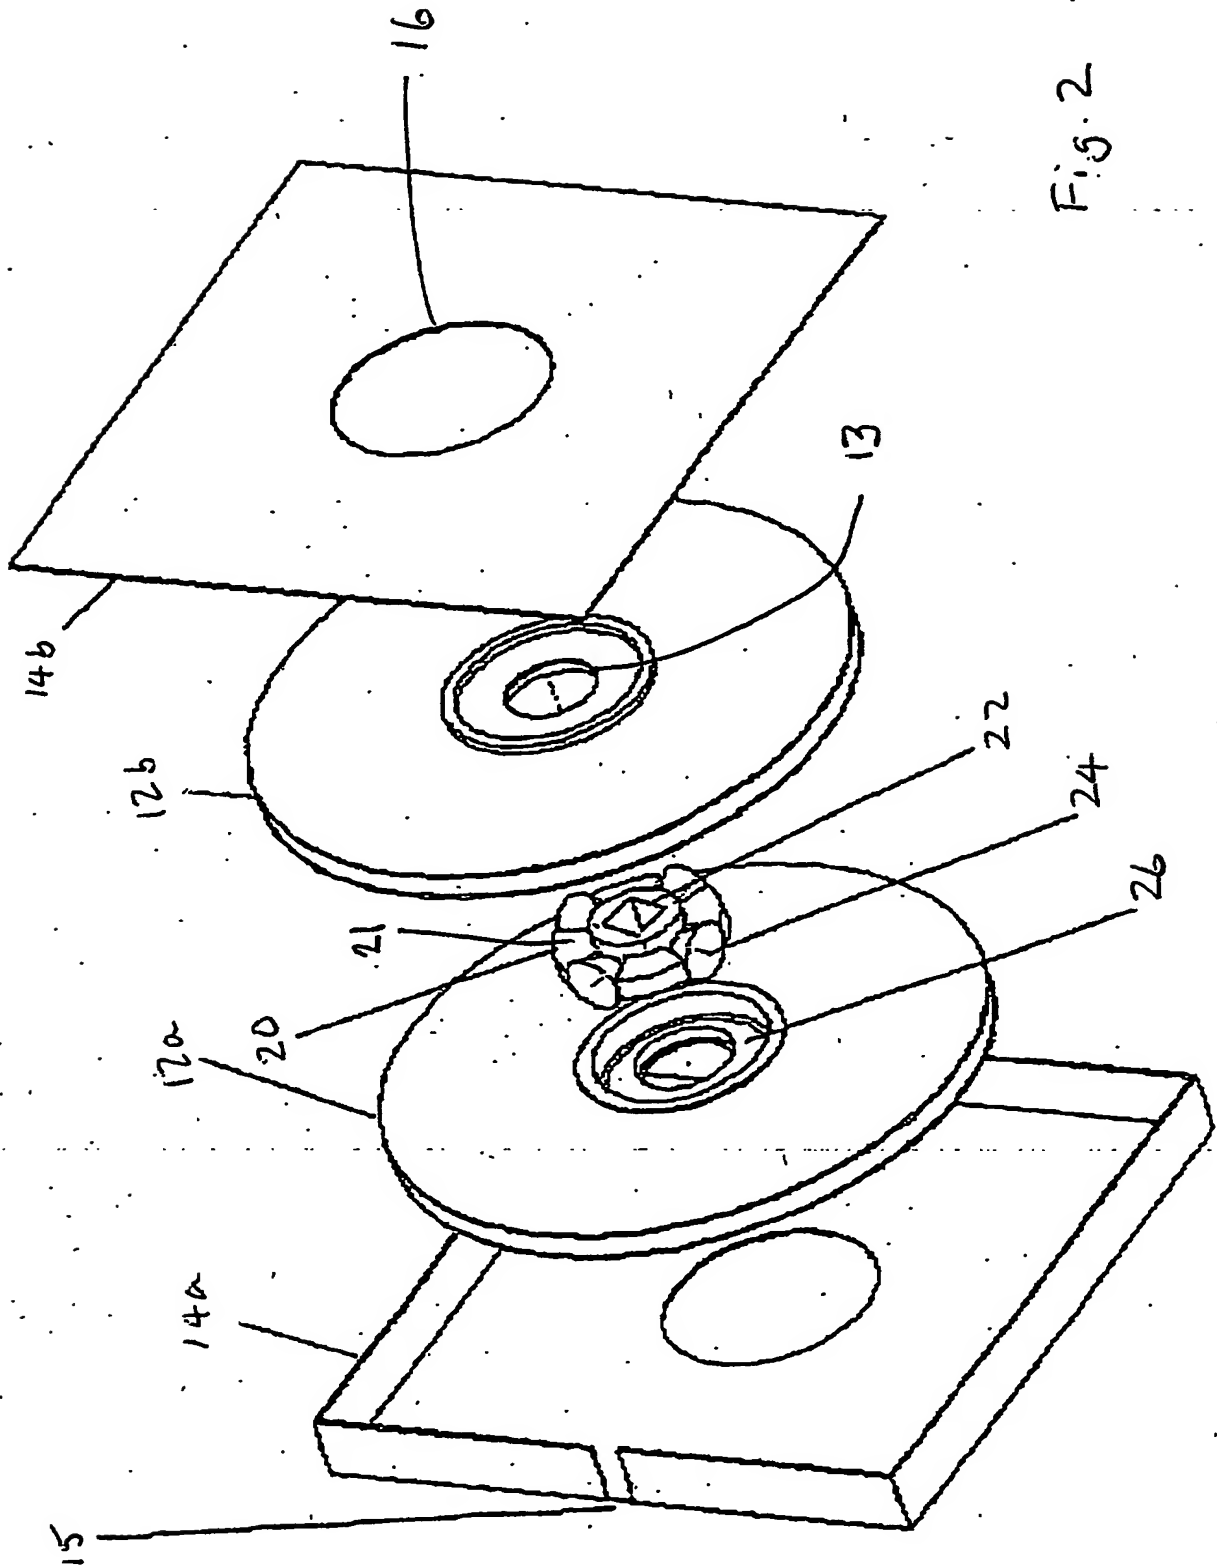


Fig. 2

PCT Application  
**EP0310754**



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☒ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☒ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**